


### Technical Data

Filtration surface:	0,32 - 1,7m <sup>2</sup>
Filtration rate:	7-80 µm
Pressure inside:	250 bar
Temperature:	320 °C
Max. Δp:	100 bar
Material:	stainless steel
Heating medium:	Dowtherm vapour or liquid

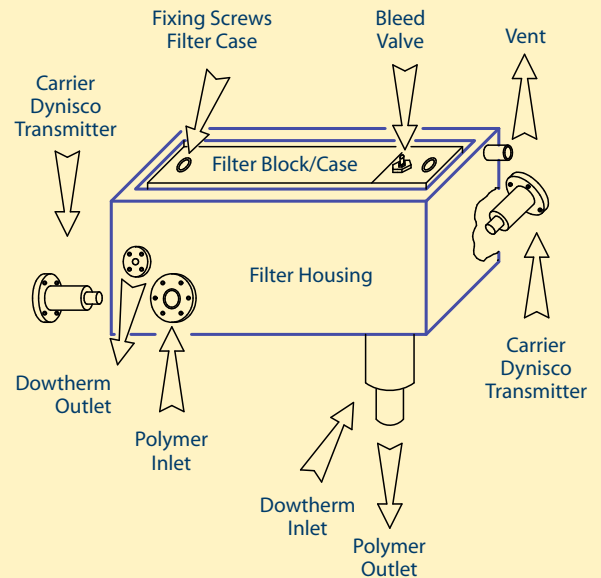


## Polymer Filter

The Polymer Filtration System that Aquafil Engineering is offering in the market was developed in the Bonazzi Group. Aquafil - Polymer - Filter have been optimized in many years of production in own spinning and polymerization plants. The unique system of reusable filter supports and separate filter hoses extend the maintenance periods and ensures always the same operating conditions and life time.

## Advantages

- easy handling during filter change
- filter hoses/supports are built for multiple use
- separate heating chamber

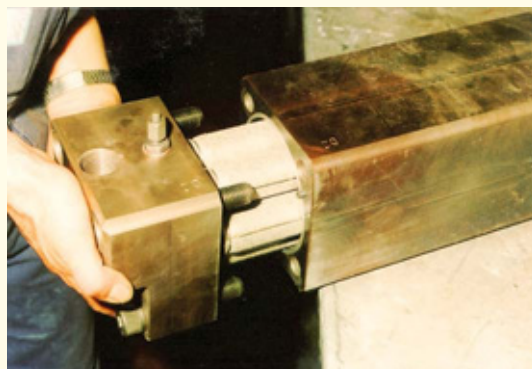

Filter element is installed in filter case



New filter hose is pushed over the support